

# WINDSOR CEDAR GARAGE DOORS

## CARE & INSTALLATION OF CEDAR GARAGE DOORS

WINDSOR CEDAR DOORS ARE MADE FROM THE HIGHEST GRADE DRY CEDAR.

IT IS MOST IMPORTANT TO SEAL THE CEDAR PANELS IMMEDIATELY. THEY MUST BE SEALED BOTH SIDES WITH AN APPROVED CEDAR PRODUCT. THIS WILL CONTROL MOISTURE PENETRATION AND FUNGAL GROWTH WITHIN THE CEDAR PANELS.

N.B. THE CEDAR PANELS MUST BE DRY & CLEAN BEFORE APPLYING SEALANTS / STAINS. WE RECOMMEND CD-50 FOR THE BEST RESULTS.

A DARK COLOUR STAIN OR PAINT WILL ATTRACT MORE HEAT THEREFORE WE RECOMMEND YOU AVOID THESE COLOURS.


CEDAR PANELS SHOULD BE REGULARLY MAINTAINED ACCORDING TO THE MANUFACTURERS AND SEALANTS INSTRUCTIONS.

WARRANTY WILL ONLY APPLY TO THOSE DOORS THAT HAVE BEEN SEALED IMMEDIATELY INSIDE AND OUTSIDE PRIOR TO INSTALLATION.

## CARE AND MAINTENANCE OF YOUR GARAGE DOOR

1. LUBRICATE MOVING PARTS (HINGES, ROLLERS, SPRING & AUTOMATIC POLE / CHAIN) WITH DRY LUBRICANT
2. MANY PARTS OF THE DOOR ARE UNDER EXTREME LOAD HENCE ONLY EXPERIENCED GARAGE DOOR INSTALLERS SHOULD MAKE ANY ADJUSTMENTS. CONSULT YOUR LOCAL AGENT IF REQUIRED
3. TO OPERATE THE DOOR MANUALLY, PULL THE RED CORD TO RELEASE THE DOOR FROM THE AUTOMATIC DRIVE. DO NOT USE THE RED CORD TO OPEN OR CLOSE THE DOOR

WHEN OPERATING THE DOOR MANUALLY BE EXTREMELY CAREFUL WHEN PULLING THE DOOR DOWN. DO NOT PUT FINGERS BETWEEN THE DOOR PANELS

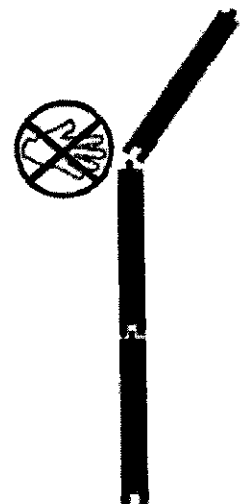

## Windsor Doors Ltd

347 Great South Road, Takanini PO Box 4, Takanini, Auckland, New Zealand  
Ph 09 298 8655 Fax 09 298 0626